


TS 560D

Operating Limits


Pressure: $\leq 0.3\text{MPa}$

Speed: $\leq 10\text{ m/s}$

Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

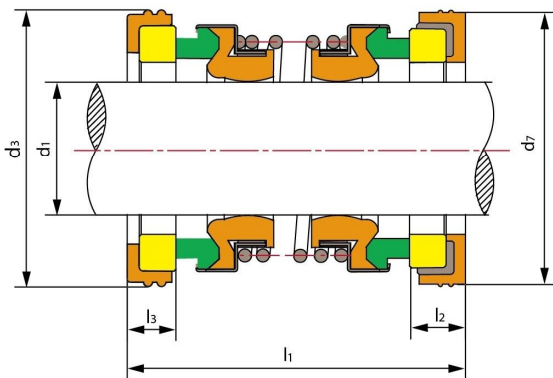

- Rotary Ring(Plastic Carbon/Carbon/SiC/TC)
- Stationary Ring(Ceramic/SiC/TC)
- Secondary Ring(NBR/EPDM/VITON)
- Spring and Other Parts(SUS304/SUS316)

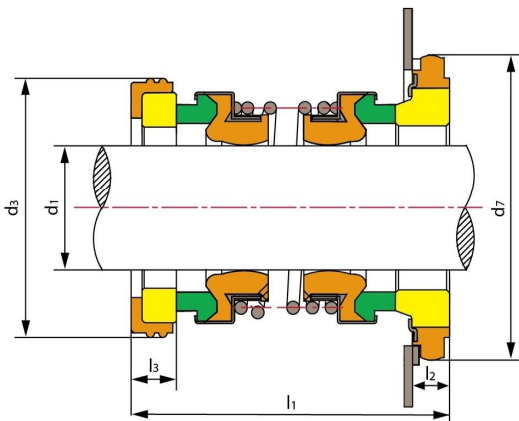

Model	d ₁ (mm)	d ₃	d ₇	l ₁	l ₂	l ₃
TS560D-13	13	25	25	36	5	5
TS560D-14	14	30	30	37	5	5
TS560D-15	15	30	30	37	5	5
TS560D-16	16	30	30	37	5	5
TS560D-18	18	35	38	49	7	10
TS560D-19	19	35	38	49	7	10
TS560D-20	20	38	44	49	7	7
TS560D-25	25	44	50	51	7	7
TS560D-30	30	50	57	59	9	8
TS560D-35	35	58	64	61	9	9
TS560D-40	40	64	70	64	11	9
TS560D-45	45	66	70	65	10	9
TS560D-50	50	72	80	69	10	9