

TS 57U


Operating Limits

Pressure: $\leq 1.2\text{MPa}$
 Speed: $\leq 20\text{m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- Rotary Ring (99% Ceramic/SiC/TC)
- Stationary Ring (Carbon/SiC)
- Secondary Seal (PTFE/VITON)
- Spring & Screw (SUS304/SUS316)
- Other Parts (SUS304/SUS316)
- Pin and set screw (sus304/sus316)

Seal size d(mm)	d	d ₃	d ₇	l ₁	l ₃	l ₄	Type
25	25.0	39.0	50.0	34.0	19.5	\	C
28	28.0	45.0	54.0	33.2	28.0	21.3	B
35	35.0	52.0	64.0	32.5	28.0	21.3	B
40	40.0	57.0	70.0	32.0	28.0	21.3	B
55	55.0	73.0	75.0	30.0	16.5	\	D
60A	60.0	78.0	92.0	40.0	27.0	21.6	B
60B	60.0	78.0	92.0	44.0	27.0	21.6	B

Seal size (inches)	d	d ₃	d ₇	l ₁	l ₃	l ₄	Type
1 1/4"	31.750	46.0	50.8	42.0	26.5	\	D
1 5/8"	41.275	58.5	60.325	45.0	16.2	\	D
1 3/4"	44.450	60.0	62.0	44.0	20.5	\	A
2 1/8"	53.975	71.2	71.4	43.0	20.8	\	A

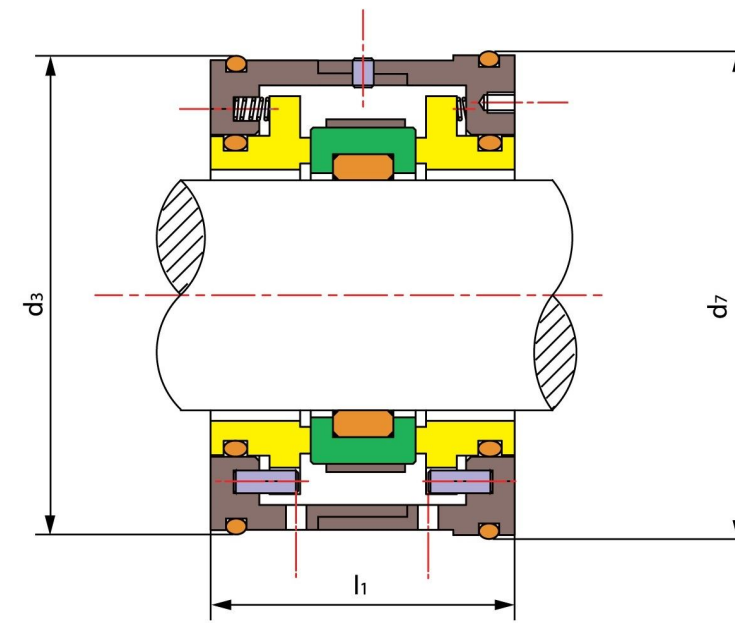

Double face kits including colletto suit EMU Pumps



TS WE

Operating Limits

Pressure: $\leq 1.5\text{MPa}$
 Speed: $\leq 20\text{m/s}$
 Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- Rotary Ring (SiC/TC)
- Stationary Ring (SiC)
- Secondary Seal (NBR/EPDM / VITON)
- Spring & Other Parts (SUS304/SUS316)
- Pin (SUS304/SUS316)

Seal size d(mm)	d ₃	d ₇	l ₁
30	62	65	46
30A	62	65	46
35	67	70	46
35A	72	72	47
40	72	75	46
50	90	92	52
50A	83	89	46
60	92	99	46