


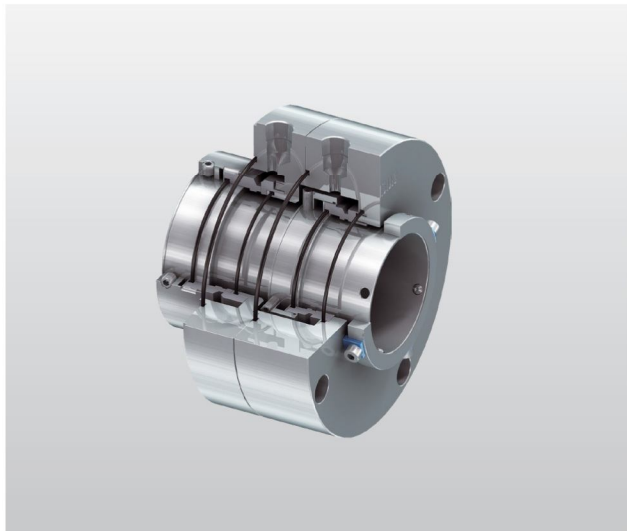

TSDC-J02

Operating Limits

Pressure: <2.1MPa(shaft diameter≤75mm)
<1.3MPa(shaft diameter>75mm)
Speed: ≤25m/s
Temperature: -30℃~+205℃

- Rotary Ring(SiC/Carbon/TC)
- Stationary Ring(SiC/TC)
- Secondary Seal(VITON/Encapsulated Ring/PTFE)
- Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)

d (inches)	d ₃	d ₂	d ₁	d ₄	d ₅	l ₂	l ₁
1.000	1.750	1.500	1.250	2.500	2.875	5.312	5.750
1.125	1.875	1.625	1.375	2.625	3.000	5.312	5.750
1.250	2.000	1.750	1.500	2.750	3.125	5.312	5.750
1.375	2.125	1.875	1.625	3.000	3.375	5.625	5.750
1.500	2.250	2.000	1.750	3.125	3.500	5.625	5.750
1.625	2.375	2.125	1.875	3.250	3.625	5.750	5.750
1.750	2.500	2.250	2.000	3.375	3.750	5.750	5.750
1.875	2.625	2.375	2.125	3.500	3.875	5.750	5.750
2.000	2.750	2.500	2.250	3.625	4.000	5.937	6.500
2.125	2.875	2.625	2.375	3.750	4.125	5.937	6.500
2.250	3.000	2.750	2.500	3.812	4.187	5.937	6.500
2.375	3.125	2.875	2.625	3.937	4.312	6.218	6.500
2.500	3.250	3.000	2.750	4.125	4.500	6.218	6.500
2.625	3.375	3.125	2.875	4.250	4.625	6.343	6.500
2.750	3.500	3.250	3.000	4.375	4.750	6.343	6.500
2.875	3.625	3.375	3.125	4.500	4.875	6.343	6.500
3.000	3.750	3.500	3.250	4.625	5.000	6.343	6.500
3.125	3.875	3.625	3.375	4.750	5.125	6.343	7.000
3.250	4.000	3.750	3.500	4.875	5.250	6.343	7.000
3.375	4.125	3.875	3.625	5.125	5.500	6.343	7.000
3.500	4.250	4.000	3.750	5.250	5.625	6.343	7.000
3.625	4.375	4.125	3.875	5.375	5.750	6.593	7.000
3.750	4.500	4.250	4.000	5.500	5.875	6.593	7.000
3.875	4.625	4.375	4.125	5.625	6.000	6.593	7.000
4.000	4.750	4.500	4.250	5.750	6.125	6.593	7.000
4.125	4.875	4.625	4.375	5.875	6.250	6.593	7.000
4.250	5.000	4.750	4.500	6.000	6.375	6.593	7.000

